



TRACK

RC1301-2.0 Qty

2 metres
Actual Length=2025mm (79 25/32")
Hole Pitch=100mm (3 15/16")
Fastening Slugs=21

RC1301-3.0 Qty

3 metres
Actual Length=3025mm (119 3/16")
Hole Pitch=100mm (3 15/16")
Fastening Slugs=31

RC1301-6.0 Qty

6 metres
Actual Length=6025mm (237 3/8")
Hole Pitch=100mm (3 15/16")
Fastening Slugs=61



TRACK JOINER

RC1301J Qty



TRACK FIXING SLUGS

RC00354 Qty

RC00360 Qty

RC00361 Qty

Slugs include M8 csk fasteners.
See www.ronstan.com website for
Track Fixing Slug Selection Table.



LUFF GROOVE TRACK

RC1302-2.0 Qty

2 metres
Actual Length=2025mm (79 25/32")
Undrilled

RC1302-3.0 Qty

3 metres
Actual Length=3025mm (119 3/16")
Undrilled

RC1302-6.0 Qty

6 metres
Actual Length=6025mm (237 3/8")
Undrilled



LUFF GROOVE TRACK JOINER

RC1302J Qty

Hull LOA:	Max. Monohull	23m (75')
	Max. Multihull	17m (56')

Sail Area:	Max. Monohull	120m ² (1292ft ²)
	Max. Multihull	93m ² (1001ft ²)

Mast details (If known):


Spar Manufacturer	
Mast Type	
Profile No.	

Mainsail details:

Luff Length (P)	
Foot Length (E)	
Qty. Full Length Battens	

Track Series 30

Captive Ball

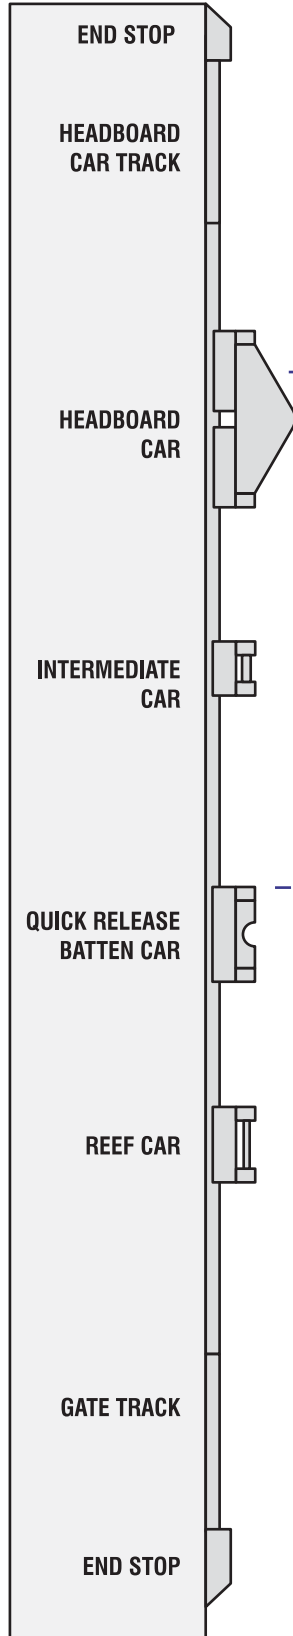

RC13080 Qty
L=37mm (1 15/32")

RC1308-1.5 Qty *
L=1500mm (59 3/32")
Hole Pitch=37.5mm (1 15/32")
Fastening Slugs=40

RC43060 Qty
L=255mm (10 1/16")

RC43063 Qty
L=69mm (2 23/32")
Typically 6 per system

RC43069 Qty
L=119mm (4 11/16")
Typically 5 per system

RC43072 Qty
L=122mm (4 13/16")
(Replaces an Intermediate car at each reef point)


Standard Gate Track
RC1309-0.3 Qty
L=325mm (12 13/16")
Hole Pitch=100mm (3 15/16")
Fastening Slugs=4

Luff Groove Gate Track
RC1309-0.3L Qty
L=325mm (12 13/16")
Undrilled

RC13081 Qty
L=65mm (2 9/16")

RC00011 Qty
RC00012 Qty (Small eyes)

HEADBOARD PLATES (Pair)



- RC00271 Qty
- RC00262 Qty
- RC00213 Qty
- RC002B1 Qty
- RC002B2 Qty

QUICK RELEASE BATTEN RECEPTACLE LINKS

*Additional headboard track sections are sometimes required to take headboard loads when reefed. Please consult your sailmaker for recommendations.